

# RATERMANN

## MANUFACTURING, INC.


### STEEL FORKLIFT *for* LPG



#### SPECIFICATIONS

MODEL/SIZE (LBS.)	20	33.5	43.5
HEIGHT (IN.)	19.2	26.9	32.8
HEIGHT (MM)	487.7	683	833
LPG CAPACITY (GAL)	4.7	7.9	10.3
LPG CAPACITY (LITER)	17.8	29.9	39
WATER CAPACITY (LBS.)	47.6	80	103.6
WATER CAPACITY (KG)	21.6	36.3	47
NOMINAL TARE WEIGHT (LBS.)	26.5	34.5	40
NOMINAL TARE WEIGHT (KG)	12	15.7	18.1
CYLINDER DIAMETER (IN.)	12.3	12.3	12.3
CYLINDER DIAMETER (MM)	312	312	312
CYLINDER VOLUME (CU. IN.)	1,318	2,214	2,868
CYLINDER VOLUME (LITER)	21.6	36.3	47
COLLAR DIAMETER (IN.)	11.4	11.4	11.4
COLLAR DIAMETER (MM)	290	290	290
COLLAR HEIGHT (IN.)	6.4	6.4	6.4
COLLAR HEIGHT (MM)	163	163	163
FOOTRING DIAMETER (IN.)	9.5	9.5	9.5
FOOTRING DIAMETER (MM)	241	241	241
STANDARD SPECIFICATION	DOT-4BA-240	DOT-4BA-240	DOT-4BA-240
PART NUMBER	LPGCYL-FLS-20	LPGCYL-FLS-33.5	LPGCYL-FLS-43.5

All dimensions are approximate.

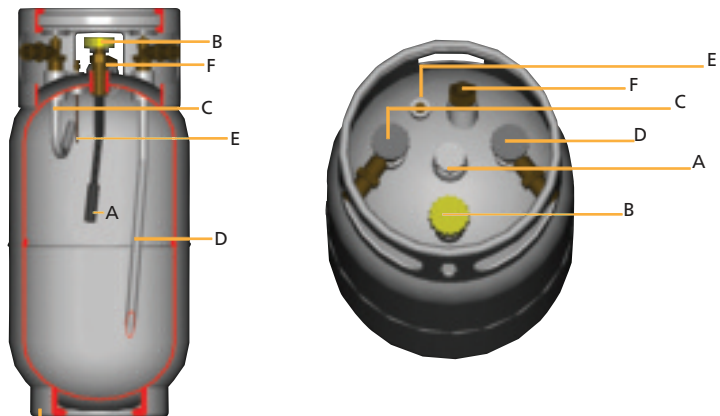

- A. Float gauge (float shown; exterior read-out not visible)
- B. Liquid fill valve
- C. Vapor withdrawal tube/valve (aluminum = non-rusting)
- D. Liquid withdrawal tube/valve (aluminum = non-rusting)
- E. Fixed liquid level
- F. Safety relief valve

Deep, heavy-duty footing provides the largest clearance in the industry.